




Ring Detector

Des19n Telerelé II

Tidligere kjent som Better by Design (BbD)

Nominal voltage:	220VAC
Maximum current:	150 mA (continuous)
Ingress protection:	IP67
Triggings voltage (telephone line):	24-120 V (20 . 50 Hz)
Input impedance (telephone line):	> 6 k Ω @ 25 Hz
Dimensions WxHxD (mm)	70x30x25

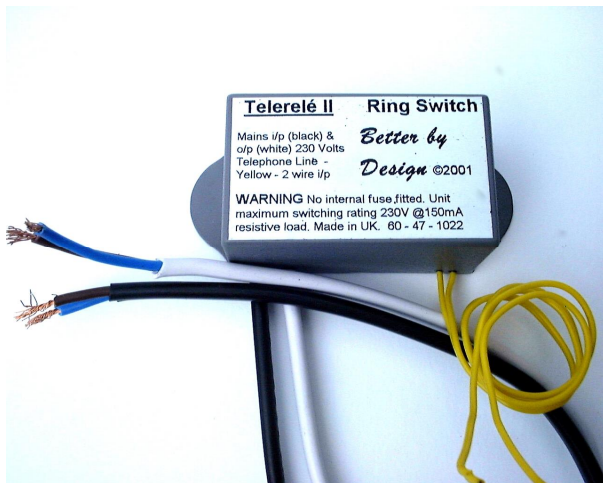

NOREX A.S.
Postboks 254
N3371 VIKERSUND
NORWAY

Tel: (+ 47) 32 78 85 85
Fax: (+ 47) 32 78 85 89
E-mail: norex@online.no